


# 11IC17230 - Universal Cable Stripper for Primary Insulation

APPLICATION RANGE	Ø 15 - 52 mm
INSULATION THICKNESS	0 - 15 mm
SUGGESTED APPLICATION	Any type of primary insulation

## Technical Characteristics

- Designed to remove the primary insulation of 6 to 45kV cables
- Helical and circular cuts
- Max. rotating diameter 220mm
- Snap knob to activate/deactivate axial feed
- Positioned on the cable like a vice system
- Designed to strip both ends
- Unlimited stripping length
- Interchangeable blade

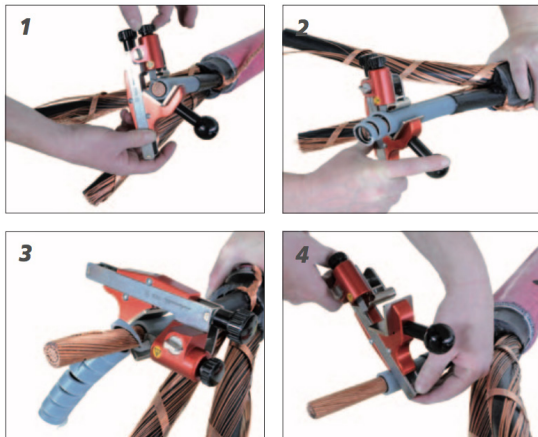


- REDUCED ROTATION ENABLES TO WORK ON LIMITED SPACE
- PERFECT CIRCULAR CUT
- NO INCISIONS ON SURFACE BELOW


## Ordering Information

DESCRIPTION	ORDER NO.	DIMENSIONS	WEIGHT
Set IMS II	11IC17230	250 x 160 x 55 mm	600g
Spare blade	11IC17232	-	-
Spare parts kit (2x plates, 1x roll, suitable screws)	11IC17235	-	-

**\*Note: Do not use on live conductors**

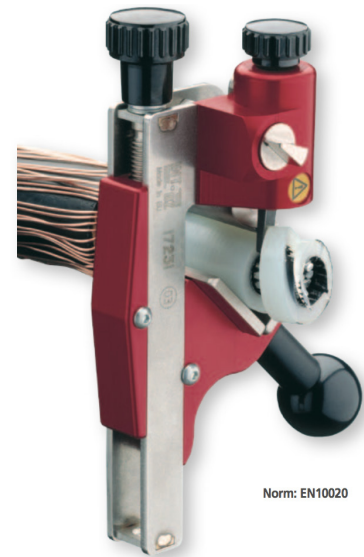

Norm: EN10020

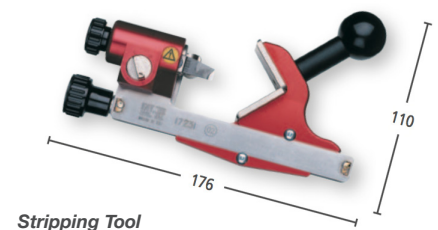

Stripping Tool



11IC17230

Drawings, where used, are not to scale. All dimensions are in millimetres and sizes given are approximate. Where possible, technical MSDS data sheets are made available on the website. All products should be installed and used in accordance with manufacturer's instructions provided. Warning: products may be the subject of registered designs and patents. Refer to website for terms and conditions on warranty.